


"Thor" by runoffgroove.com

PCB layout by Pablo De Luca (aka Gringo), for personal use only.

Version 1.31 February 03, 2007




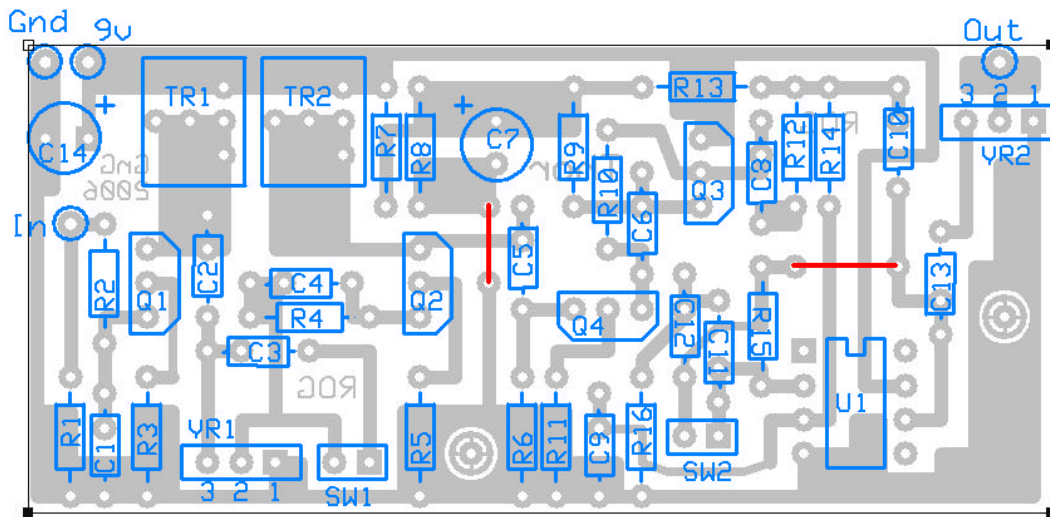


(Red stripes are jumpers)

Parts List:

Capacitors	Resistors	Semiconductors	Misc
C1 220p	R1 1M	Q1 2N5457	SW1 SPST Bright
C2 1n	R2 33k	Q2 J201	SW2 SPST Bottom
C3 470p	R3 390	Q3 2N5457	
C4 470p	R4 470k	Q4 2N5457	
C5 100n	R5 1k	U1 TL071	
C6 100n	R6 220k		
C7 100uF	R7 10k		
C8 100n	R8 10k		
C9 470p	R9 1M		
C10 1n	R10 390		
C11 22n	R11 390		
C12 22n	R12 120k		
C13 100n	R13 56k		
C14 100uF	R14 39k		
	R15 100k		
	R16 33k		
	TR1 5k trim		
	TR2 20k trim		
	VR1 1M A Gain		
	VR2 100k A Level		

Transfers:

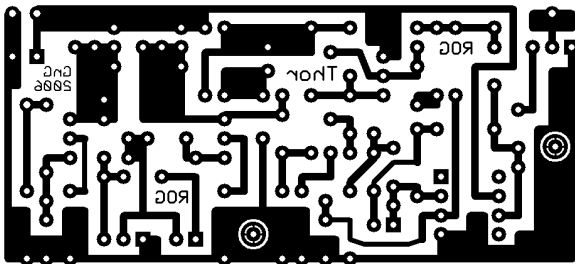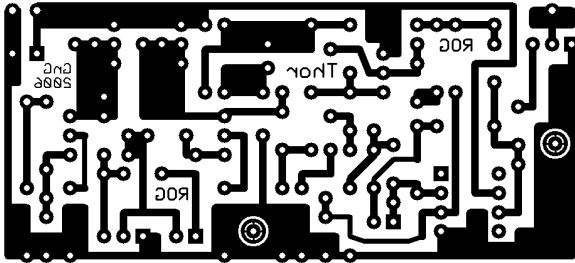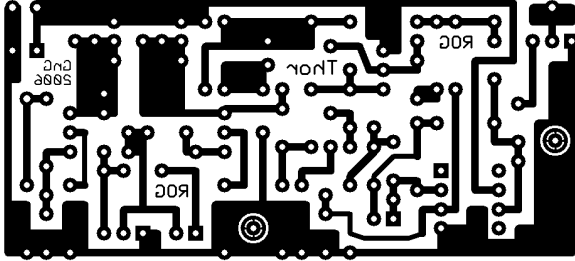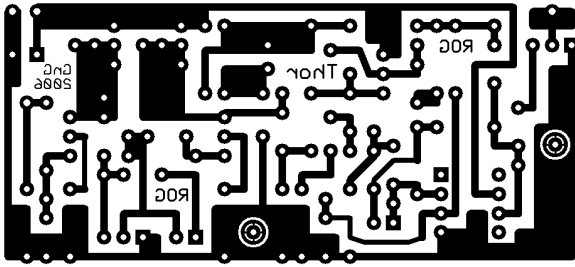

Board Dimensions: 76.2mm x 34.93mm (3" x 1.375") aprox.